




LOGIPIX 20 MP TRAFFIC BULLET CAMERA WITH IR LASER FLASH

TRAFFIC ENFORCEMENT CAMERA FOR HIGHWAY APPLICATIONS.

TRAFFIC VIOLATION DETECTION SYSTEM



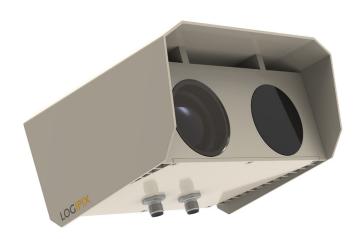

LOGIPIX 20 MP TRAFFIC BULLET CAMERA WITH IR LASER FLASH

The 20 Megapixel Traffic Bullet Camera with IR Laser Flash was designed to fulfill special requirements. It can cover vast areas and can operate in different lighting conditions.

Thanks to the 1" sensor, the camera has excellent low-light performance, high sensitivity and a resolution that one finds in professional cameras. The camera produces a 20 FPS video stream at full resolution, therefore any motion in the footage seems continuous. The device uses the visually lossless JPEG2000 wavelet-based compression method, compressing each frame separately. The video stream does not contain predicted frames.

The 20 Megapixel Day/Night Camera is encased in a rugged IP67 housing. It provides high-performance images, even in extreme environmental conditions, in temperatures ranging from -20°C to 65°C.

KEY FEATURES

- 1" size, CMOS image sensor with extra high-sensitivity
- 20 MP resolution
- 20 FPS at full resolution
- Wide Dynamic Range
- · Varifocal Field of View
- Wide temperature range, -20 °C to 65 °C
- 5504 x 3648 pixel resolution
- JPEG2000 Wavelet

- 1 GBit Ethernet interface
- Integrated adjustable mounting bracket
- 24 V DC operating voltage
- 500W output power, multiple power illumination mode
- 808 nm wavelength
- Varifocal illumination
- · Automatic self-cleaning system Optional
- IP67



SPECIFICATION

| Part number | LPIX20-BTVL-B36W241S001I01 |
|------------------------|--|
| Description | 20 MP Traffic bullet camera built in f=14-50 mm lens, with IR Laser Flash |
| Function | Day - IR band suppressed |
| | Night - All band enabled |
| | Traffic - IR bandpass filter for IR Flash, 808nm Infrared Laser correction |
| Sensor Resolution | 5504 (H) x 3648 (V) |
| rame rate | 20 fps @ 20 MP |
| Video compression | JPEG2000 – Wavelet |
| | MPX24 Signal Processor |
| | 1" color 20 Megapixel CMOS |
| Auto focus | Motorized back focus adjustment |
| Scanning system | Progressive, no interlaced scanning |
| Shutter type | Electronic rolling shutter (ERS) |
| Shutter mode | 1/10 – 1/20 000 s, 1/1 s low shutter mode |
| Sensitivity | 0.02 lux F1.4 Day mode or 0.002 lux F1.4 Night mode |
| Gain control | Fix, auto, blur or noise priority |
| Backlight compensation | Whole picture or any area selectable |
| Lens | Multi-megapixel varifocal lens, f=14-50 mm, F=2.6, P-IRIS |
| | Motorized zoom and focus |
| | 14 mm: Horizontal: 50.42°/ Vertical: 34.66° |
| | 50 mm: Horizontal: 15.02°/ Vertical: 9.99° |
| nputs / Outputs | 4 programmable IO connections NO, NC / OC 0.5 A/30 V |
| Field of beam | 6° - 38° |
| Nominal wavelength | 808 nm |
| Light output power | 500W Pulse |
| Ethernet connection | 1 Gbit / Low Voltage Power over Ethernet (LPoE) |
| Network security | 1500 bit public-key RSA; User authentication |
| Configuration | Configuration software via Ethernet |
| Intelligence | Integrated motion detection |
| | Video Content Analysis |
| Self-cleaning | Wiper and washer - Optional |
| Approvals | EN 55032:2015/AC:2016, EN 61000-3-2:2014, EN 61000-3-3:2013, |
| | EN 50130-4:2011/A1:2015, IEC/EN 60529, IEC 60950-1 |

| ENVIRONMENTAL SPECIFICATION | |
|-----------------------------|-----------------------------------|
| Operating voltage | 24 V DC, powered by the NVR |
| Over voltage protection | Yes |
| Power consumption | 7.2 W + 5 W Laser |
| Operating temperature | -20 °C to 65 °C (4 °F to +149 °F) |
| Storage temperature | -20 °C to 70 °C (4 °F to +158 °F) |
| Humidity | up to 100% RH (condensing) |
| Protection classification | IP67 |
| Impact resistance | IK10 |





SPECIFICATION

| MECHANICAL SPECIFICATION | |
|--------------------------|--|
| Dimensions (W x H x L) | 110 x 200 x 180 mm (With sunshield. Connectors are not included) |
| Weight | Max. 3 kg |
| Material of the housing | Aluminum with corrosion protection coating, Marine grade |
| Camera window | Hardened coating |
| Connector | Round connector, aluminum (MIL-DTL-26482 series 1) |

| RELATED COMPONENTS | | |
|--------------------|--|--|
| Logipix NVR | | |
| Part number | Description | |
| LNVR4-10-16 | LNVR 4th gen. 6U x 350 mm x 19" rack, 1x10GBit SFP+ for cameras, 1x10GBit SFP+ and 1x1Gbit for remote monitoring, 16 hot-swap SATA HDD bay | |
| LNVR4-SE-16 | LNVR 4th Storage Extender 6Ux 350 mmx19" rack, 2x10 GBit SFP+ for NVR, 16 hot-swap SATA HDD bay | |
| LNVR4-#-#-O-XX | Logipix 4 th Outdoor NVR | |
| LNVR4-8-16-I | Logipix 4 th NVR with VCA license, 4+4 cameras, 16 hot-swap SATA HDD bay | |
| LNVR4-8-8-I | Logipix 4 th NVR with VCA license, 4+4 cameras, 8 hot-swap SATA HDD bay | |
| Logipix RADAR | | |
| Part number | Description | |
| LPIX-RAD-02 | Logipix 4D multi-lane Radar 76-81GHz | |
| Logipix SOFTWARE | | |
| Part number | Description | |
| SDB08-CC+ | Logipix Control Center Professional | |
| SDB08-CCU | Logipix Control Center Ultimate | |
| VMC | Logipix Traffic Software | |

DIMENSIONS (all values are in mm)

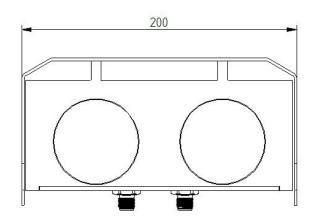

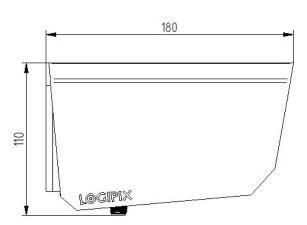



LOGIPIX 20 MP TRAFFIC BULLET CAMERA & IR LASER

ABOUT US

Logipix Technical Development Ltd. is a privately held company established in 1996 in Budapest, Hungary. Since then, Logipix

has grown into an international company that it is today. We are among the most innovative technological companies in the

world, developing and manufacturing intelligent video monitoring solutions specifically for large-scale projects and wide areas.

Logipix believes, serving the needs of customers efficiently can only be successful if they receive complete solutions. In order

to achieve this, we design and create all the critical components to our solutions, including hardware, software and embedded

computer vision. Our entire product range is developed and manufactured in Hungary in accordance with the highest quality

requirements.

Our own, specially developed Image Processing Unit, moreover, Logipix Panoramic and Computer Vision Technologies allowed

our company to reach new possibilities in video surveillance. Uniquely in the market we provide video analysis on hundreds of

megapixel resolution JPEG2000 image streams.

We are proud that we stand among the leading pioneers in this ever-evolving market. We are deeply engaged with the constant

research and development to provide complete, intelligent solutions using the latest microelectronic and computer technology

available, while considering the various characteristics of different application areas.

CERTIFICATION

Logipix Ltd. operates an ISO 9001:2015 quality management system that covers software and hardware development, along

with the entire manufacturing process.

The primary objective of Logipix Ltd. is to win the satisfaction and confidence of its customers within the framework of market

competition. This is achieved via the quality of its services, which also includes compliance with the individual requests of

customers, which we regard as legitimate even if not stipulated in the contract. We comply with the requirements of society

laid out in laws and regulations, and achieve employee satisfaction via the effective and economic organization of their work.

In order to attain its objectives in quality policy, Logipix Ltd. undertakes the obligation to operate a quality management system

developed and documented in compliance with the requirements of the MSZ EN ISO 9001:2015 standard.

CONTACT DETAILS

LOGIPIX LTD.

Kesmark utca 11-13, H-1158, Budapest

Phone: +36 1 410-0556

E-mail: sales@logipix.com

Web: www.logipix.com